


+150°C -40°C






| D | 150 |
|-------|--------------------|
| F | 40 |
| Н | 181 |
| AxA | 100x85 |
| AAxBB | 80x60 |
| EE | 9 |
| Е | 46 |
| 0 | 120 |
| LC | 250 |
| | F H AxA AAxBB EE C |

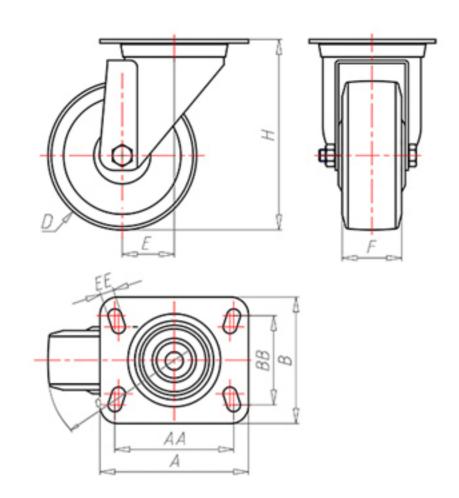

Code for plain bore wheel





Code for wheel with coated bush

LGZ15045BR



Code for wheel with double BT self-lube bush



Code for wheel with double HT ball bearing

