


**DITHERM
STW**

+280°C
-70°C

INOX

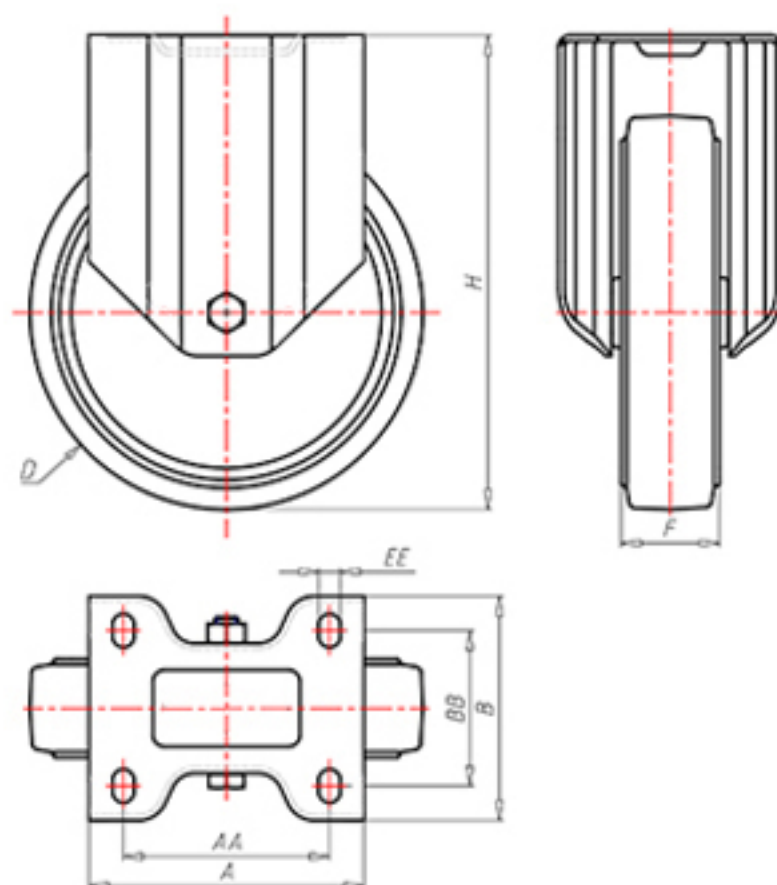

	D	100
	F	30
	H	128
	AxB	100x85
	AAxBB	80x60
	EE	9
	LC	250



Code for plain bore wheel

SFX100



Code for wheel with coated bush

SFX100BR



Code for wheel with double BT self-lube bush

SFX100BT



Code for wheel with double HT ball bearing

SFX100C

