




+280°C
-70°C



	D	80
	F	30
	H	108
	AxB	100x85
	AAxBB	80x60
	EE	9
	LC	230

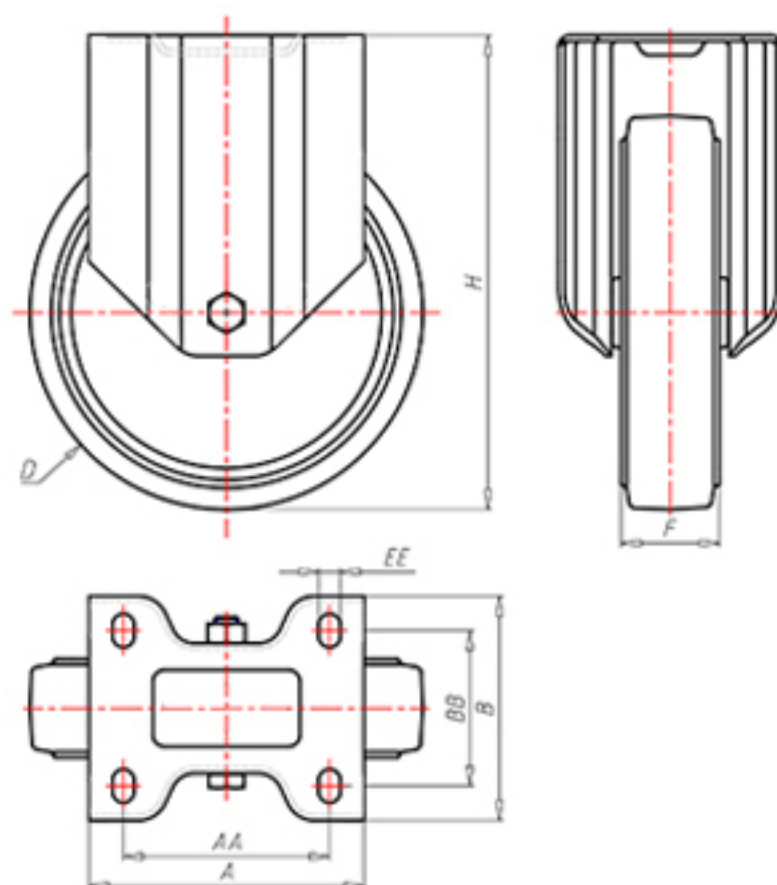

Code for plain bore wheel

SFZ80



Code for wheel with coated bush

SFZ80BR



Code for wheel with double BT self-lube bush

SFZ80BT



Code for wheel with double HT ball bearing

SFZ80C

