DITHERM MTW

+280°C

-70°C

iNOX

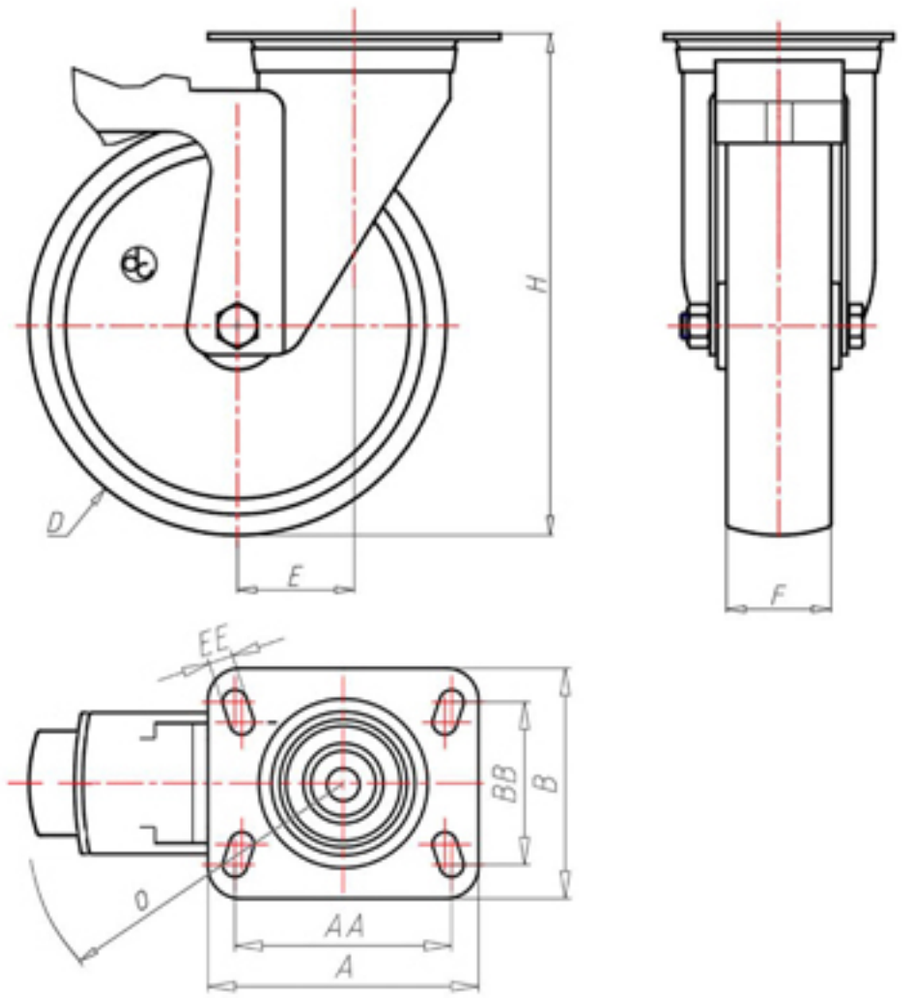

D	100
F	30
H	128
AxB	100x85
AAxBB	80x60
EE	9
E	42
O	124
LC	220

Code for plain bore wheel

SGX100FS

Code for wheel with coated bush

SGX100BRFS

Code for wheel with double BT self-lube bush

SGX100BTFS

Code for wheel with double HT ball bearing

SGX100CFS