




+400°C  
-50°C



	D	100
	F	35
	L	45
	DD	Ø 10
	LC	250

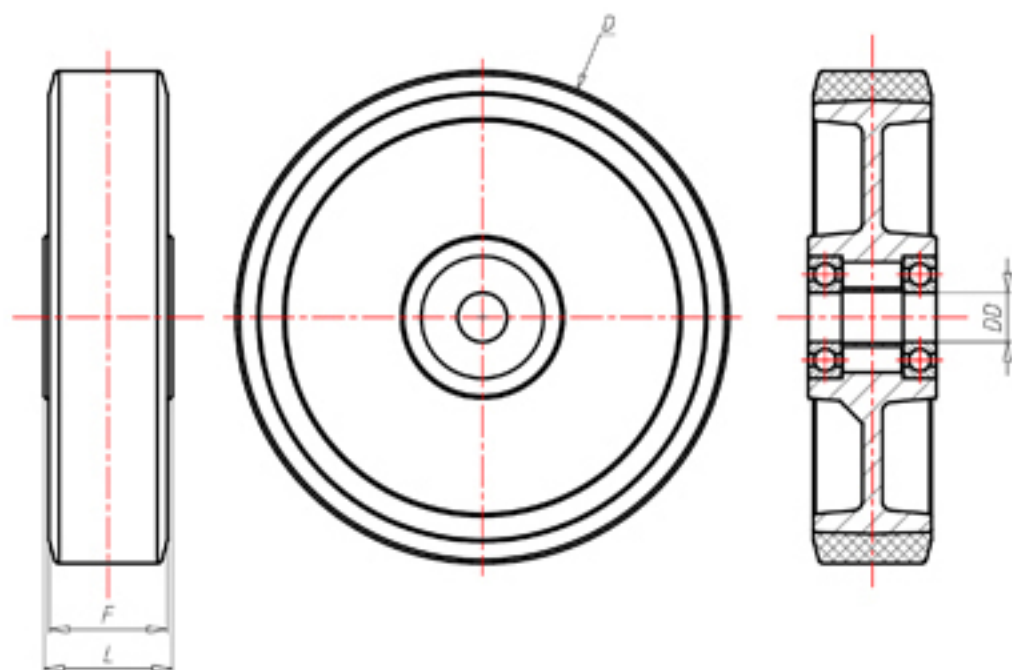

Code for plain bore wheel

-



Code for wheel with coated bush

-



Code for wheel with double BT self-lube bush

XTW100BT



Code for wheel with double HT ball bearing

-

